

Baril Coatings BV  
Nieuwe Donk 15  
4879AC Etten-Leur  
NETHERLANDS

**Eurofins Product Testing A/S**  
Smedeskovvej 38  
8464 Galten  
Denmark

[voc@eurofins.com](mailto:voc@eurofins.com)  
[www.eurofins.com/voc-testing](http://www.eurofins.com/voc-testing)

Date  
2 June 2015


# VOC Emission Test report

## 1. Sample Information

Sample identification	Copperant PURA Muurverf
Product type	Paint
Batch no.	AR150318-1
Production date	18-03-2015
Date when sample was received	07/04/2015
Testing (start - end)	23/04/2015 - 21/05/2015

## 2. Resulting VOC Emission Class Label

This recommendation is based on French regulation of March 23, 2011 (décret DEVL1101903D) and of April 19, 2011 (arrêté DEVL1104875A). For details please see [www.eurofins.com/france-voc](http://www.eurofins.com/france-voc)

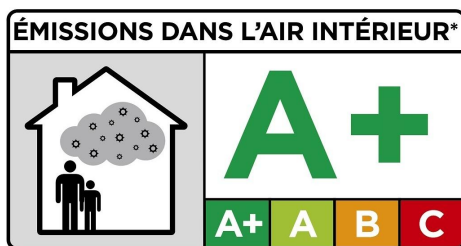

\*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

The product was assigned a VOC emission class without taking into account the measurement uncertainty associated with the result. As specified in French Decree no. 2011-321 of March 23, 2011, correct assignment of the VOC emission class is the sole responsibility of the party responsible for distribution of the product in the French market.

## 3. Conclusion on CMR emissions

The tested product fulfills the requirements of the French regulation DEVP0908633A of 30 April 2009 and DEVP0910046A of 28 May 2009. For details please see [www.eurofins.com/france-voc](http://www.eurofins.com/france-voc).

The results are only valid for the tested sample(s).

This report may only be copied or reprinted in its entirety, parts of it only with a written acceptance by Eurofins.

## 4. Test Method

Method	Principle	Parameter	Quantification limit	Uncertainty	
ISO 16000 parts -3, -6, -9, -11 Internal method numbers: 9810, 9811, 9812, 2808B, 8400	GC/MS HPLC/UV	VOC Volatile aldehydes	2 µg/m <sup>3</sup> 3 µg/m <sup>3</sup>	22% (RSD)	
ISO 16000 parts -3, -6, -9, -11 Internal method numbers: 9810, 9811, 9812, 2808B, 8400, 2616	GC/MS	4CMR	<1 µg/m <sup>3</sup>	Um = 2 x RSD=45 %	
<b>Test chamber parameter</b>					
Chamber volume, l	119	Temperature, °C	23±1	Relative humidity, %	50±3
Air change rate, 1/h	0.5	Loading ratio, m <sup>2</sup> /m <sup>3</sup>	1		
<b>Test condition: Sample stayed in test chamber during the whole 28 days testing period.</b>					
<b>Sample preparation</b>					
The sample was homogenised and applied onto a glass plate. That test specimen was preconditioned in a separate chamber for three days.					
Application amount, g/m <sup>2</sup>	120	Number of layers	1	Drying time, h	Preconditioning

## 5. Results

	Concentration after 28 days $\mu\text{g}/\text{m}^3$	C	B	A	A+
TVOC	160	>2000	<2000	<1500	<1000
Formaldehyde	7.3	>120	<120	<60	<10
Acetaldehyde	4.5	>400	<400	<300	<200
Toluene	< 2	>600	<600	<450	<300
Tetrachloroethylene	< 2	>500	<500	<350	<250
Ethylbenzene	< 2	>1500	<1500	<1000	<750
Xylene	< 2	>400	<400	<300	<200
Styrene	< 2	>500	<500	<350	<250
2-Butoxyethanol	< 2	>2000	<2000	<1500	<1000
1,2,4-Trimethylbenzene	< 2	>2000	<2000	<1500	<1000
1,4-Dichlorobenzene	< 2	>120	<120	<90	<60
<b>CMR compounds</b>		Maximum allowed air concentration			
Benzene	<1	<1			
Trichloroethylene	<1	<1			
Dibutylphthalate (DBP) *	<1	<1			
Diethylhexylphthalate (DEHP) *	<1	<1			

< Means less than

> Means higher than

\* Not a part of our accreditation (EN ISO/IEC 17025:2005) by DANAK (no. 522))



Maria Pelle  
Chemist